



GLOBAL FINISHING SOLUTIONS

High Bay Lights

General Purpose Lighting for:

- > Commercial buildings
- > Factory and production facilities
- > Gymnasiums
- > Hangars
- > Industrial facilities
- > Warehouses



High Bay Lighting



Designed as an energy-efficient alternative to metal halide lights and T-12 light fixtures, GFS' High Bay Light Fixtures can be used in a variety of industrial and general purpose settings. Common applications include commercial buildings, gymnasiums, industrial facilities and warehouses.

Design Benefits

- Made with quality materials and expert craftsmanship in the USA
- E.T.L. listed
- May qualify for utility rebates (programs throughout the USA)
- Feature a highly reflective aluminum reflector
- Lumen maintenance of over 96% (T8), 95% (T5) ensures proper light levels over life
- Easily mount with V clips and adjustable cable kit (sold separately)
- Wire guard available
- High bay sensor available



GFS Part Number:
LFG-1749-6

GFS Part Number:
LFG-1749-6-T5

Fixture Accessories

- Power Cable: 6 ft & 10 ft lengths
- Suspension Cable: 5 ft, 10 ft & 15 ft lengths, #2 Loop Gripple
- Reflectors: Standard "Wide" light distribution
Deep Well "Narrow" light distribution
- Bracket V-Hanger
- Wire guard 16.5" x 48"
- Tube/Bulb: 230-281 (T8), 230-285 (T5)





LFG-1749-6 with
Wire guard
LFGA-WG1648



Technical Specifications

| | T8 Fixtures | T5 Fixtures |
|----------------------------|---|-------------|
| Housing: | Rigid cold-rolled steel | |
| Finish: | Pre-coated white finish | |
| Lamp Type: | T8 | T5HO |
| Lamp Wattage: | 32 | 54 |
| Fixture Wattage | 220 | 360 |
| Voltage: | 120-277 | |
| Light Distribution: | Narrow or Wide | |
| Ballasts: | 2 electronic ballasts (programmed start and instant start) | |
| Reflector: | Highly polished reflector | |

Dimensions & Wiring

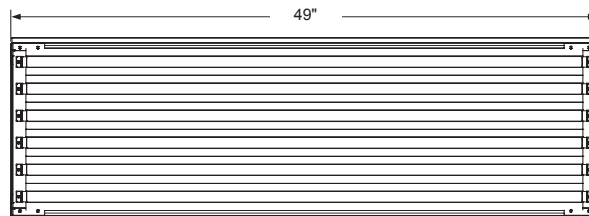


6 TUBE WIRING - (Two Ballasts)

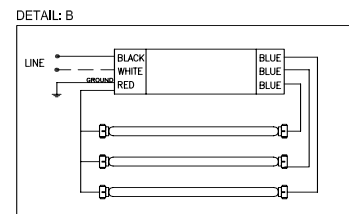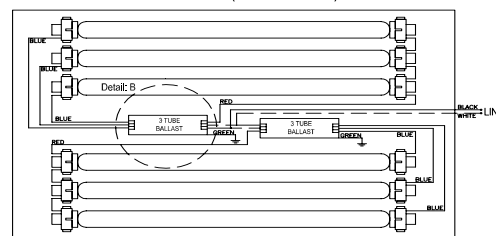

| INTELLI-VOLT BALLASTS | |
|---------------------------|---------------------------|
| 6 Tube Fixtures | |
| 120 Volt | 277 Volt |
| 3 Tube | 3 Tube |
| 0.71A | 0.31A |
| 60HZ | 60HZ |
| 32W | 32W |
| (0.71A per ballast) | (0.31A per ballast) |
| (1.42A per light fixture) | (0.62A per light fixture) |

WWW.GLOBALFINISHING.COM • 800-848-8738 • industrial@globalfinishing.com



Use your smart phone
to visit our website:

Follow GFS:



facebook.com/globalfinishing



twitter.com/globalfinishing